

Biometric Full Height Turnstile

FHT2400: Full Height Turnstile

FHT2411: Full Height Turnstile with RFID Access Control System


FHT2422: Full Height Turnstile with Fingerprint and RFID Access Control System

Semi-automatic
mechanism

Visible indicator

SUS304 stainless
steel cabinet

Modular design

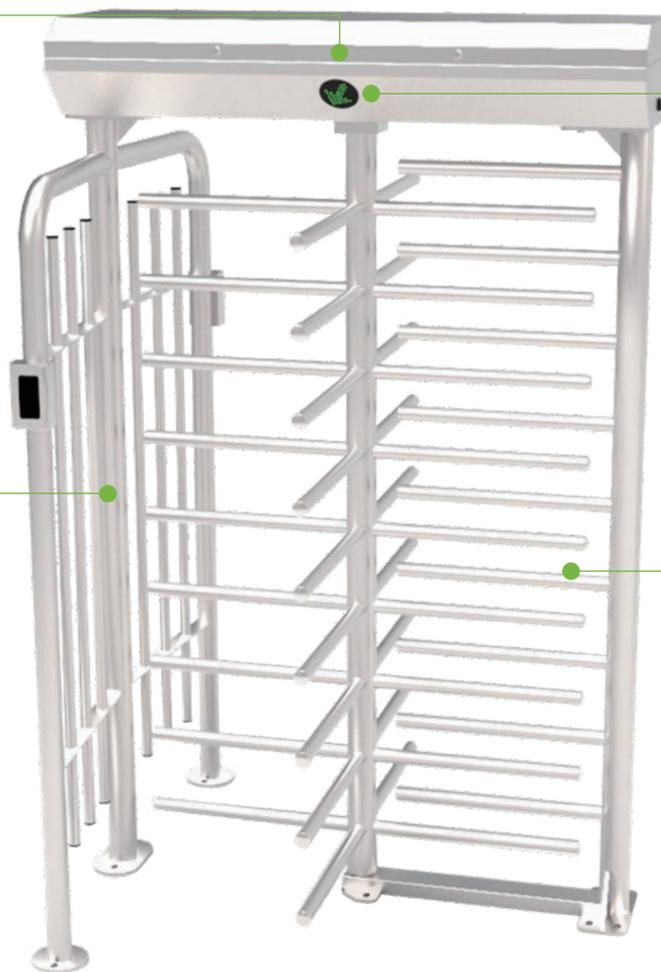

Application



Industrial facility



Corporate security



Government security




Public transportation

Specifications

Power Requirements		AC110V/220V, 50/60Hz
Working Temperature		-28°C to 60°C
Working Humidity		25% to 75%
Working Environment		Indoor/Outdoor
Speed of Throughput	RFID	Maximum 20/minute
	Fingerprint	Maximum 15/minute
Lane Width		560 mm
Footprint (L*W)		1400*1320 (mm)
Dimension (L*W*H)		1400*1320*2220 (mm)
Dimension with Packing (mm)		1520*1220*2230 (mm)
Net Weight (kg)		230kg
LED Indicator		Supports
Cabinet Material		SUS304 Stainless Steel
Barrier Material		SUS304 (optional: SUS316)
Barrier Movement		Rotating
Emergency Mode		Supports
Security Level		High
MCBF		1 million
Ingress Protection		IP54
Warranty		1 year

Dimensions (mm)

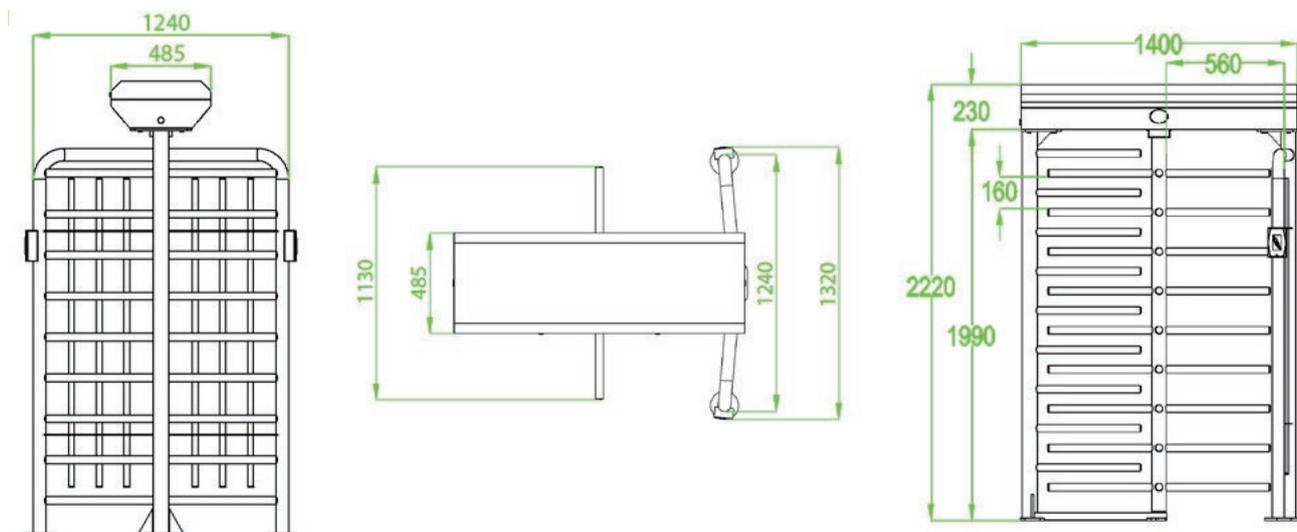

To prevent the corrosion of stainless steel, we recommend not to use in highly corrosive environments, such as sea-side, chemical plants and saline-alkali soils.

