



New
PRODUCT

30% OFF
**FOR ARCHIVED
ITEMS ON SALE**

For limited time and
minimum purchase

Indoor Rental Display

DG01-C1P26 | DG01-C1P29 | DG01-C1P39

The LED rental screen is a specialized LED display used for stage performances and cultural events. It is typically available for lease, hence the name is "**LED rental screen**". The LED rental display features a customized die-cast aluminum box design, known for its lightweight, slim profile, and quick installation. Its lightweight construction allows for easy transportation and removal, making it suitable for both large-scale.

Key Feature



Lightweight And Portable



Quick installation and labor-saving



Noise-free



High protection


Applications



Stage



Exhibition

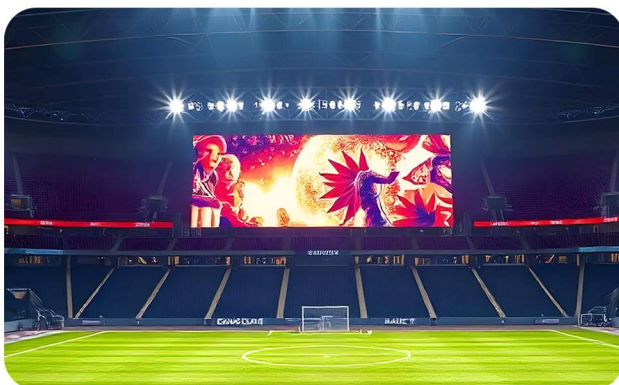

Stadium



Optical Store

Specifications

Display			
Model	DG01-C1P26	DG01-C1P29	DG01-C1P39
Pixel pitch	2.604mm	2.97mm	3.91mm
LED type	1515 SMD 3-in-1	2121 SMD 3-in-1	2121 SMD 3-in-1
Brightness	500-700 nits	500-700 nits	500-700 nits
Color temperature	7500K ~ 10000K	7500K ~ 10000K	7500K ~ 10000K
Viewing angle	H: 110°;V:110°	H: 110°;V:110°	H: 110°;V:110°
Cabinet Size	500*500*90 500*1000*90	500*500*90 500*1000*90	500*500*90 500*1000*90
Cabinet resolution	192*192 Dots 192*384 Dots	168*168 Dots 168*336 Dots	128*128 Dots 128*256 Dots
Pixel Density	147456 pixels/m ²	112896 pixels/m ²	65536 pixels/m ²
Driving method	1/32S	1/28S	1/16S
Greyscale	14 bits	14 bits	15 bits
Brightness control	Manual/Automatic	Manual/Automatic	Manual/Automatic
Maximum contrast	(3000:1)	(3000:1)	(3000:1)
Frequency	60 Hz	60 Hz	60 Hz
Refresh rate	1920~3840 Hz	1920~3840 Hz	1920~3840 Hz
Input voltage	200 ~ 240Vac 100 ~ 240Vac	200 ~ 240Vac 100 ~ 240Vac	200 ~ 240Vac 100 ~ 240Vac
Input power frequency	50/60Hz	50/60Hz	50/60Hz
Power specification	500-H (200W5Vdc) 1000-H (400W5Vdc)	500-H (200W5Vdc) 1000-H (400W5Vdc)	500-H (200W5Vdc) 1000-H (400W5Vdc)
Input power <max>	500W/m ²	500W/m ²	500W/m ²
Input power <typical>	150W/m ²	150W/m ²	150W/m ²
Lifespan	≤50,000 Hours	≤50,000 Hours	≤50,000 Hours
viewing distance	2M-15M	2M-15M	3M-15M
Weight	500-H 8.5 kg/panel 1000-H 10.6 kg/panel	500-H 8.5 kg/panel 1000-H 10.6 kg/panel	500-H 8.5 kg/panel 1000-H 10.6 kg/panel
Diagonal	500-H 27.8° 1000-H 44°	500-H 27.8° 1000-H 44°	500-H 27.8° 1000-H 44°
Aspect ratio	500-H 1:1 1000-H 1:2	500-H 1:1 1000-H 1:2	500-H 1:1 1000-H 1:2
Material	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Ingress protection	IP45	IP45	IP45
Operating temperature	(-10)°C~(+45)°C/ ≤55%RH	(-10)°C~(+45)°C/ ≤55%RH	(-10)°C~(+45)°C/ ≤55%RH
Humidity	(-10)°C~(+45)°C/ ≤55%RH	(-10)°C~(+45)°C/ ≤55%RH	(-10)°C~(+45)°C/ ≤55%RH
Storage Temperature/Humidity	(-10)°C~(+55)°C/ ≤55%RH	(-10)°C~(+55)°C/ ≤55%RH	(-10)°C~(+55)°C/ ≤55%RH
Rigging Form	Fixed with support bracket	Fixed with support bracket	Fixed with support bracket