




VizionGuard Meeting Signage

DG03-A9W10 | DG03-A9W15

01 2 Modes of Authentication

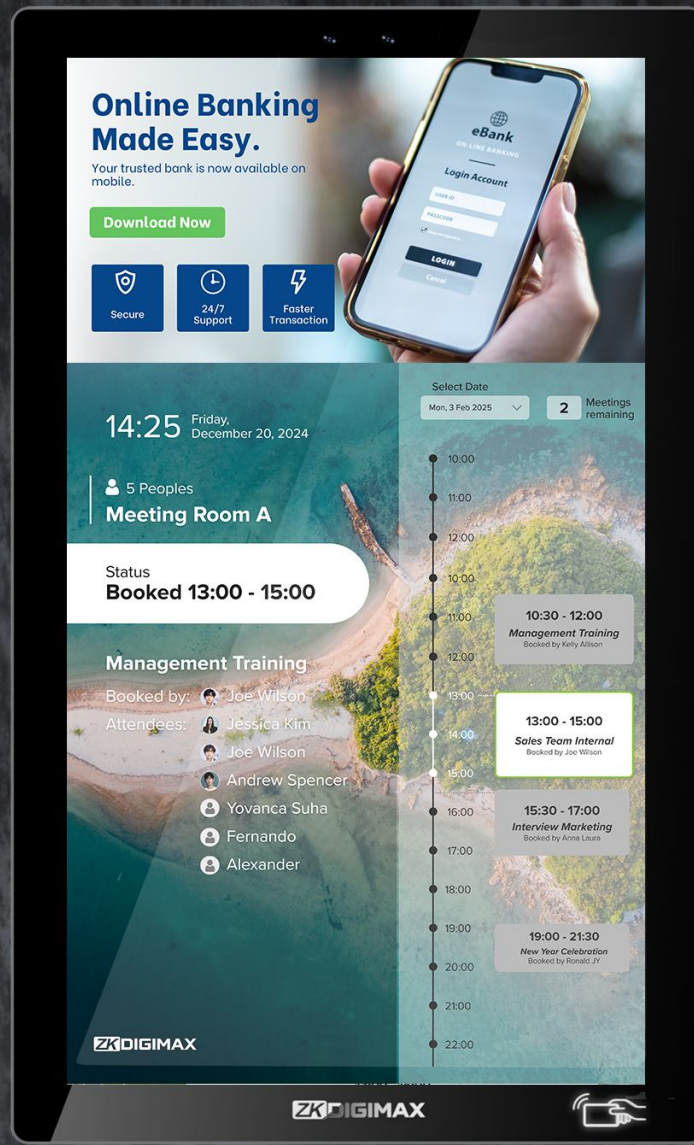

Facial



Card
Authentication



02 Two Side Options

10 inch




15 inch



03

Display Layout Options

10 inch


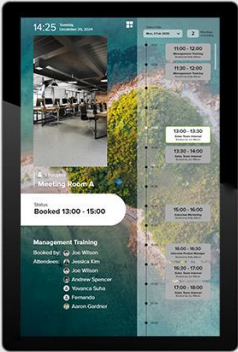


Normal Layout





Ads Layout

15 inch

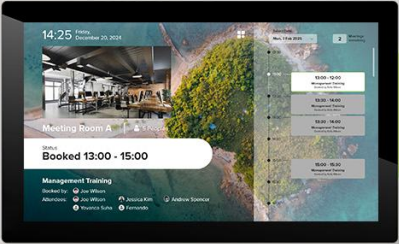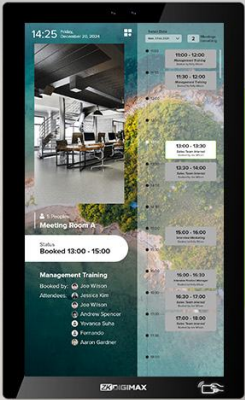


Normal Layout

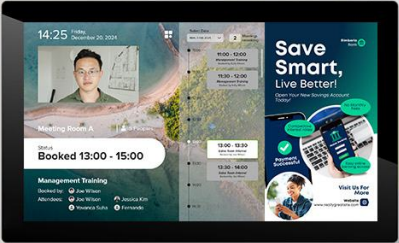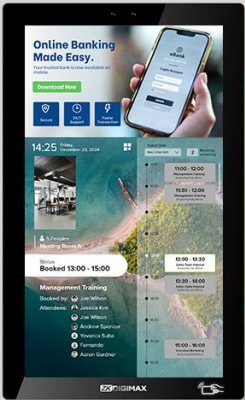

Ads Layout

04 Wide-range of Background Library

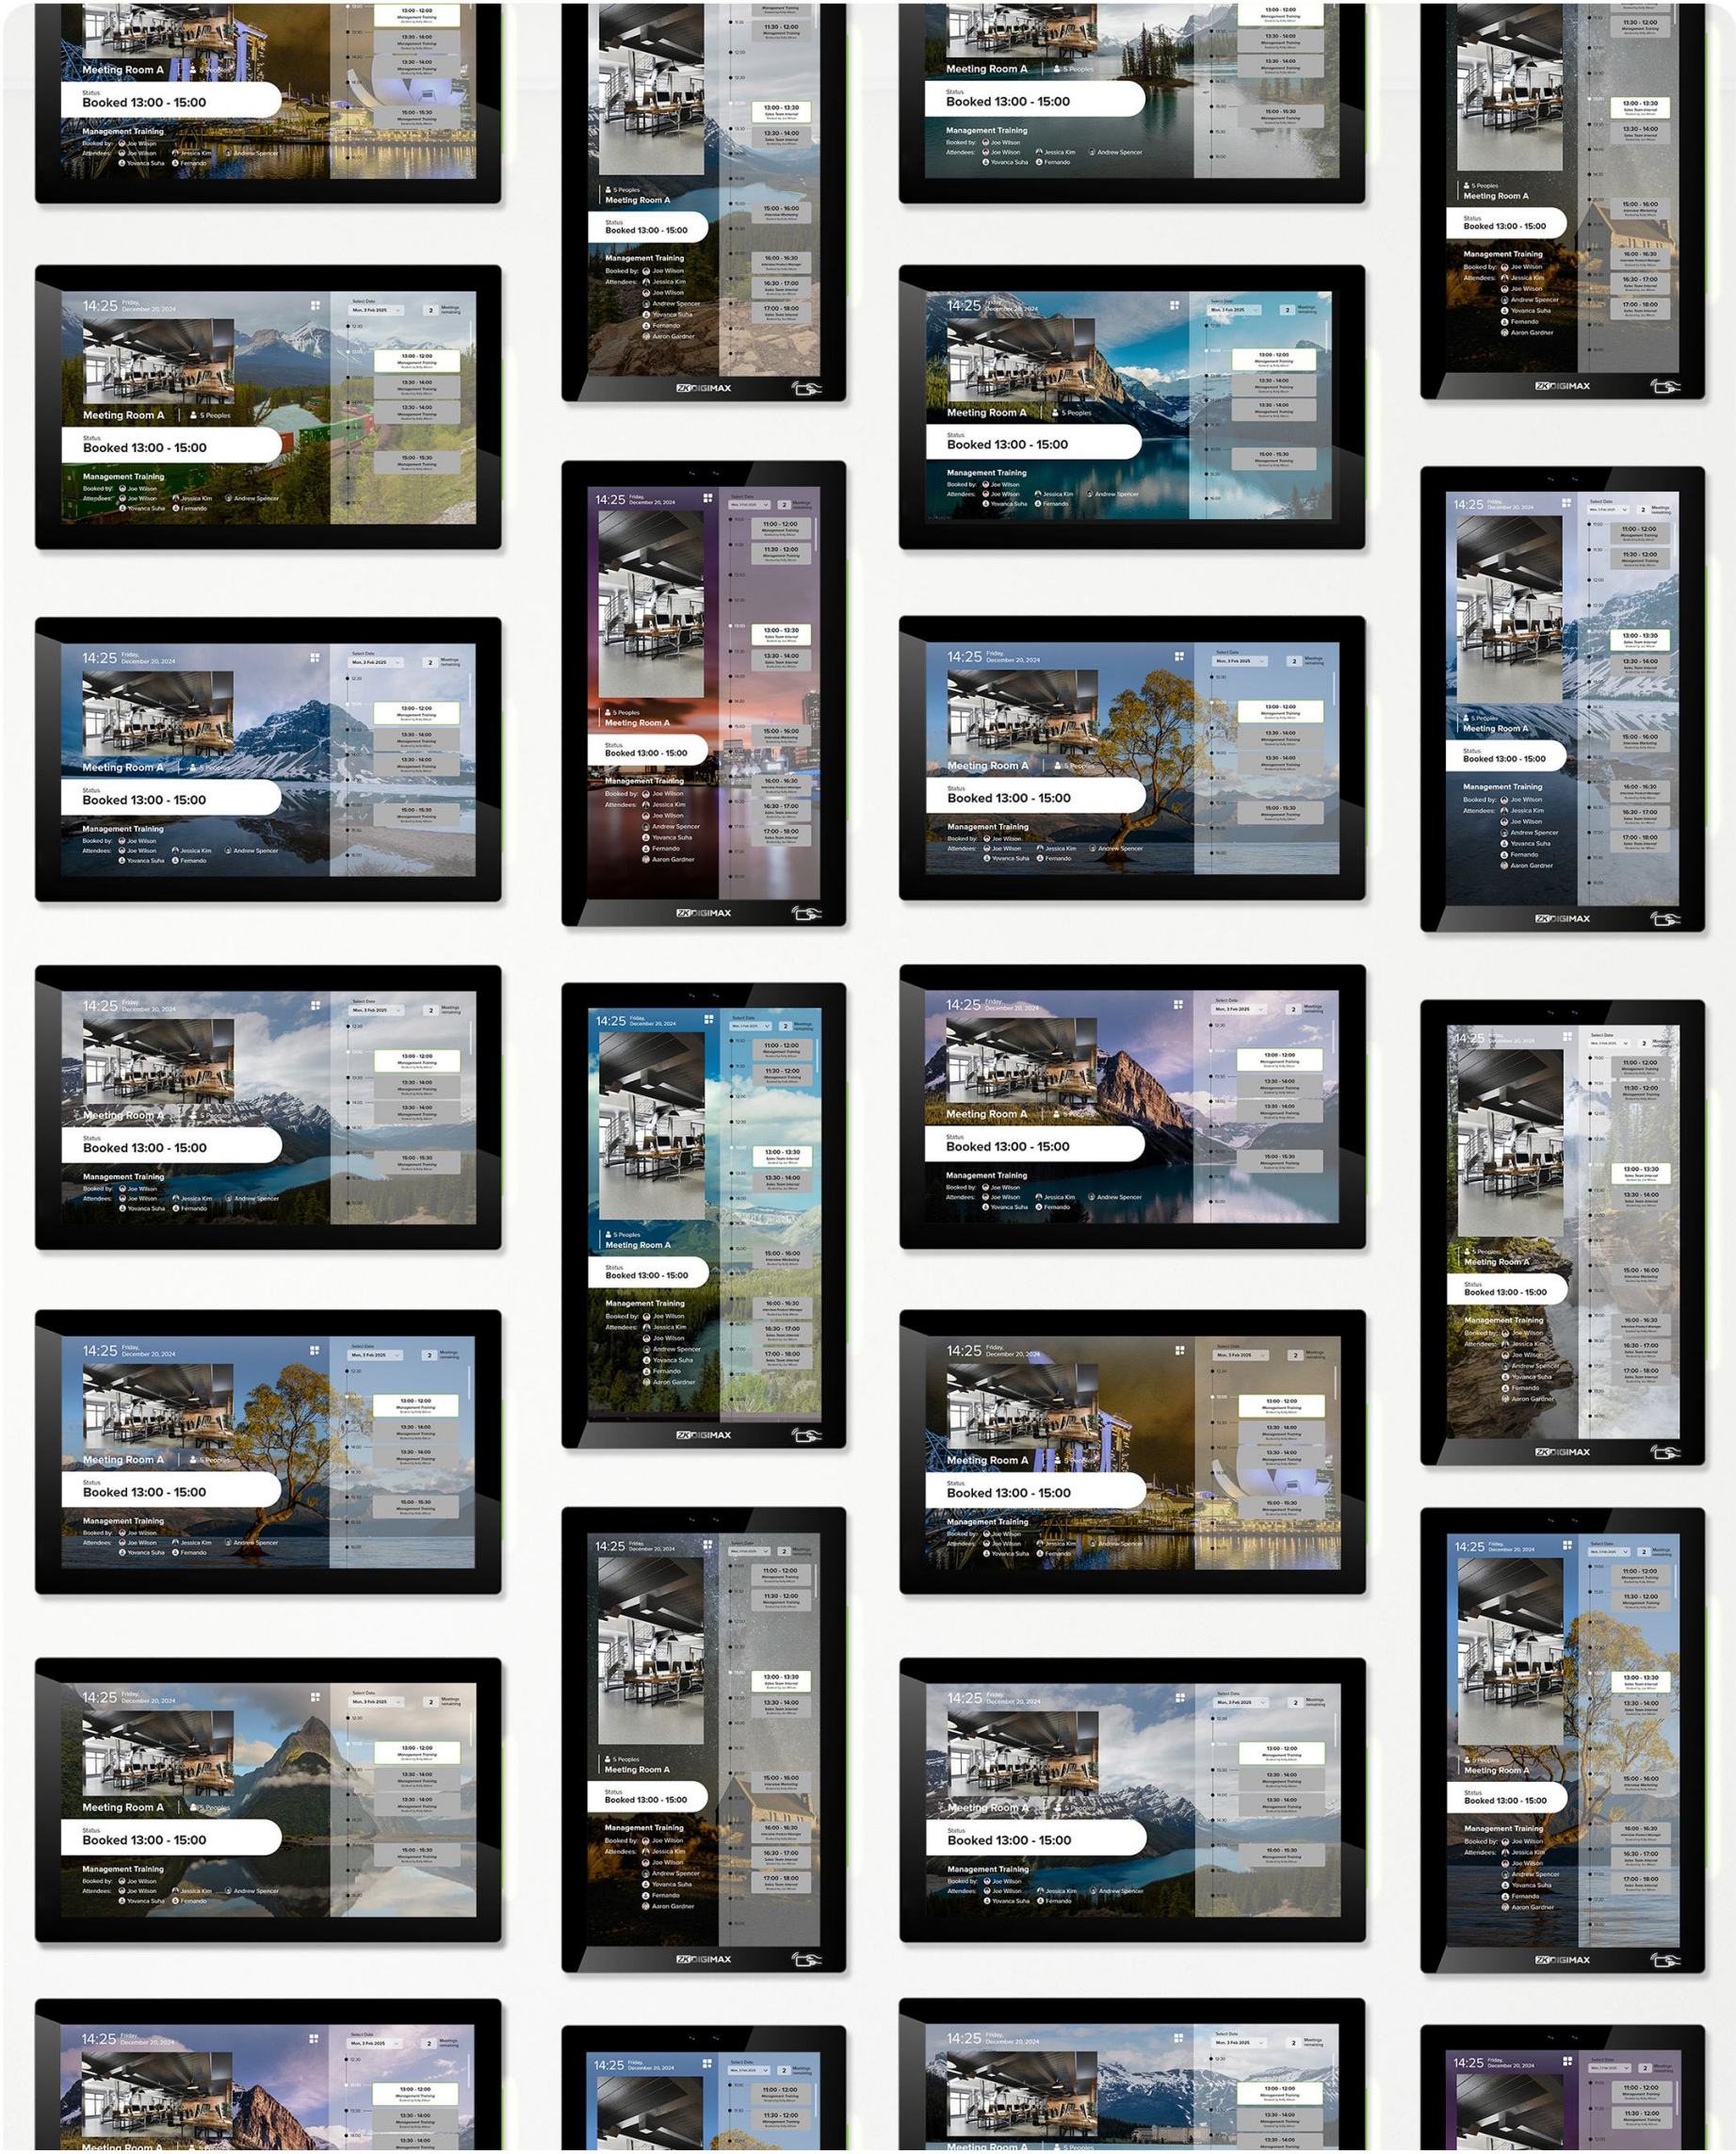

05 Role-Based Meeting Management

A powerful meeting room system with tailored dashboards for Admins, Receptionists, and Users — all connected to smart access control.

Admin Dashboard

Manage Meeting Rooms

ZK DIGIMAX

Home

Meeting Room

Meeting Room

Check Availability

Approval List

Booking List

Device Management

User Management

Activity Log

Meeting Room A

Photos

Description

Tower A, 20th Floor

Capacity: 10 people

Equipment: HDMI Cable, Adapter, Type C Cable, Screen, Speaker, Marker

Operating Hours: 09:00 - 17:00

Approval Needed

Delete Room

Modify Room

Book

Booking List

Upcoming

Pending

Past

Canceled

Select Date

February 3, 2025

Search

Monday, 03 Feb 2025

Marketing Meeting 1

Approved by Admin 2

8 person

09:00 - 12:00

Monday, 03 Feb 2025

Marketing Meeting 2

Approved by Admin 2

4 person

09:00 - 12:00

Monday, 03 Feb 2025

Marketing Meeting 2

Approved by Admin 2

4 person

09:00 - 12:00

Check Room Availability & Book Instantly

ZK DIGIMAX

Mon, 3 February 2025

Hi, Admin!

adminmeeting@zkdigimax.com

Search name, meeting, or room

Meeting Room

Device Management

User Management

Activity Log

Feb/03/2025

Select Date

Filters

Time

09:00 09:30 10:00 10:30 11:00 11:30 12:00 12:30 13:00 13:30 14:00 14:30 15:00 15:30 16:00 16:30 17:00

Meeting Room A

Meeting Room B

Meeting Room C

Meeting Room D

Meeting Room E

Meeting Room F

Meeting Room G

Meeting Room H

Meeting Room I

Manage Meetings & Permissions

ZK DIGIMAX

Home

Meeting Room

Check Availability

Approval List

Booking List

Device Management

User Management

Activity Log

Approval List

Select Date

3 Feb 2025

Search

Search name or room

Date

Time

Meeting Room

Created by

Status

Approval

3 Feb 2025

09:00-12:00

Meeting Room A

Kelly Amber

Pending

Approve

Reject

3 Feb 2025

09:00-12:00

Meeting Room B

Jimmy Kim

Pending

Approve

Reject

3 Feb 2025

09:00-12:00

Meeting Room A

Anna Laura

Pending

Approve

Reject

3 Feb 2025

09:00-12:00

Meeting Room B

Jimmy Kim

Pending

Approve

Reject

Receptionist Dashboard




View Upcoming Meetings




Monitor Meeting Requirements

User Dashboard

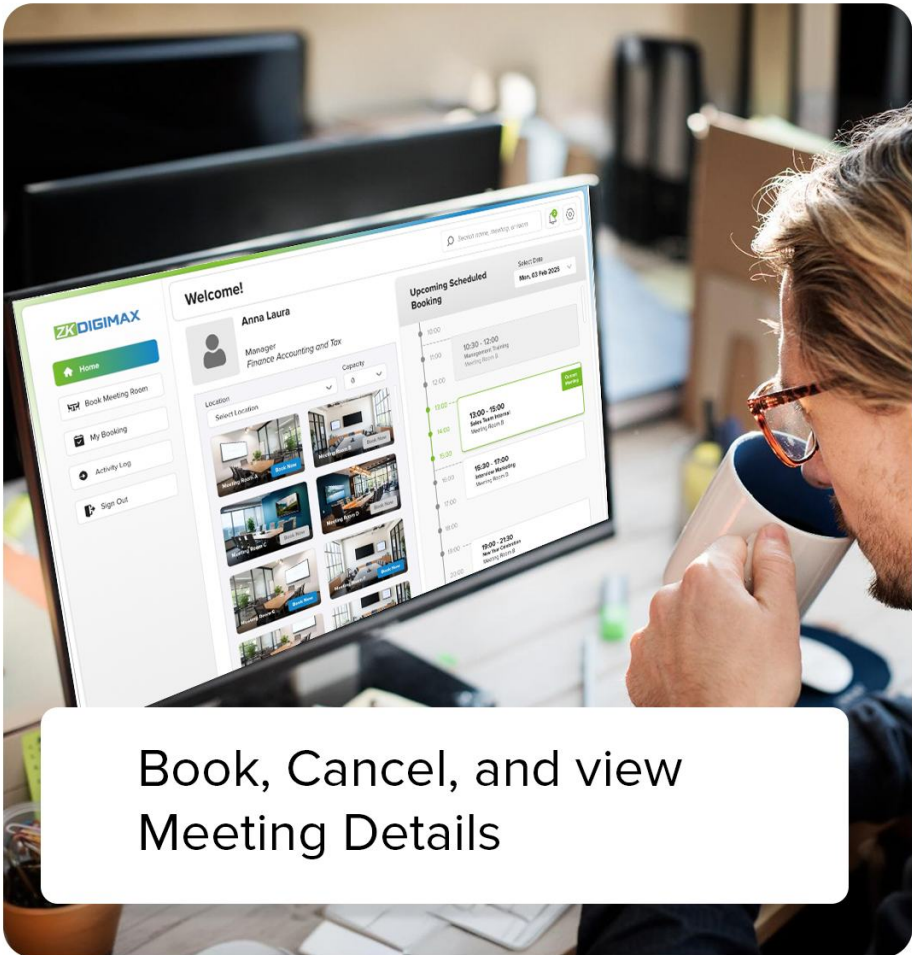


Book, Cancel, and view Meeting Details

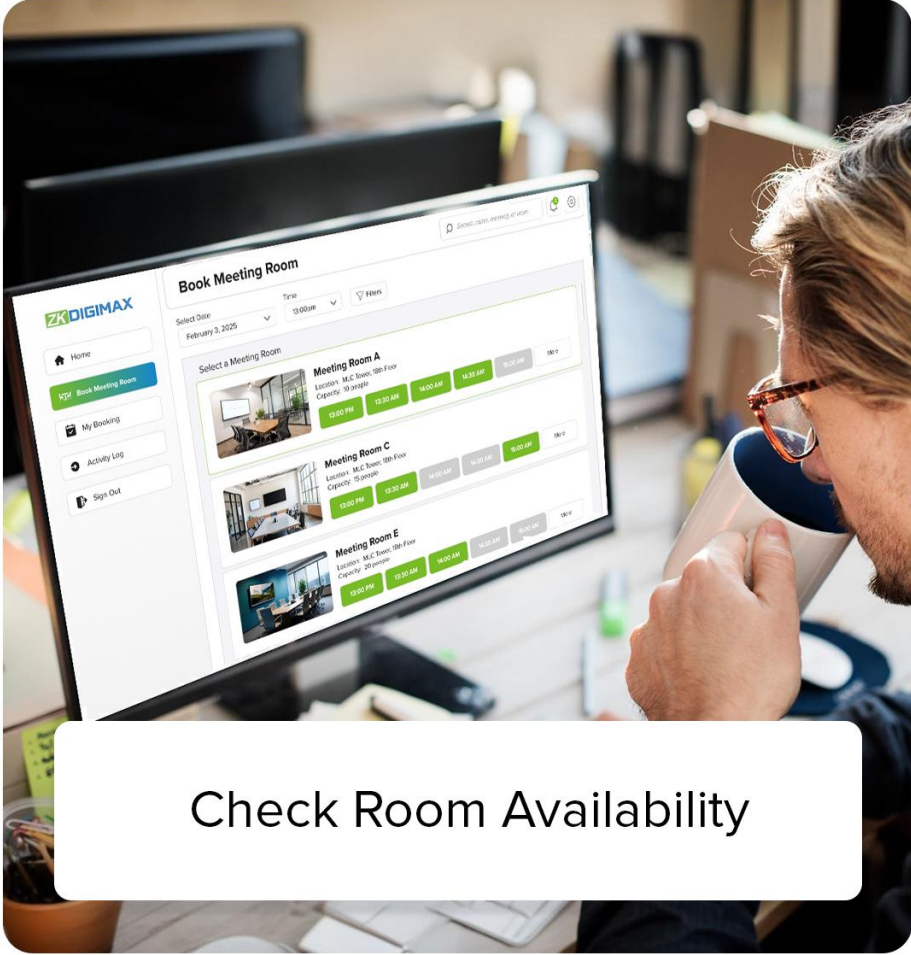


Check Room Availability

Applications

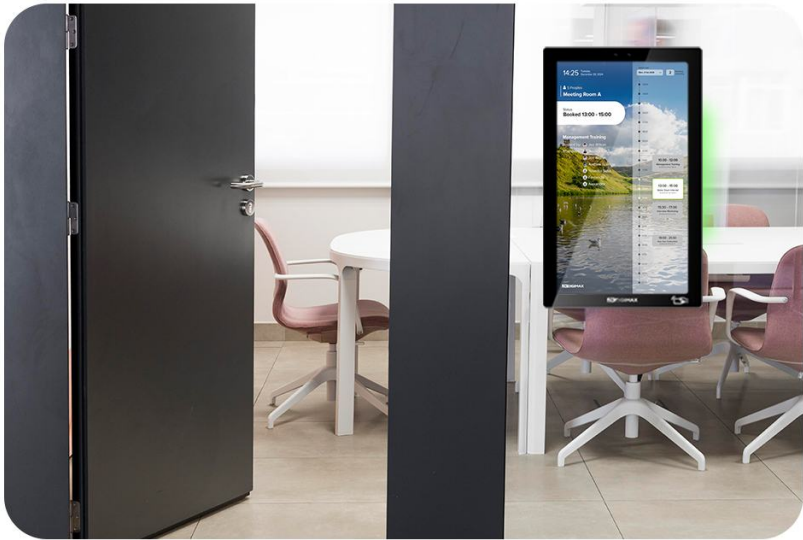


Office Buildings

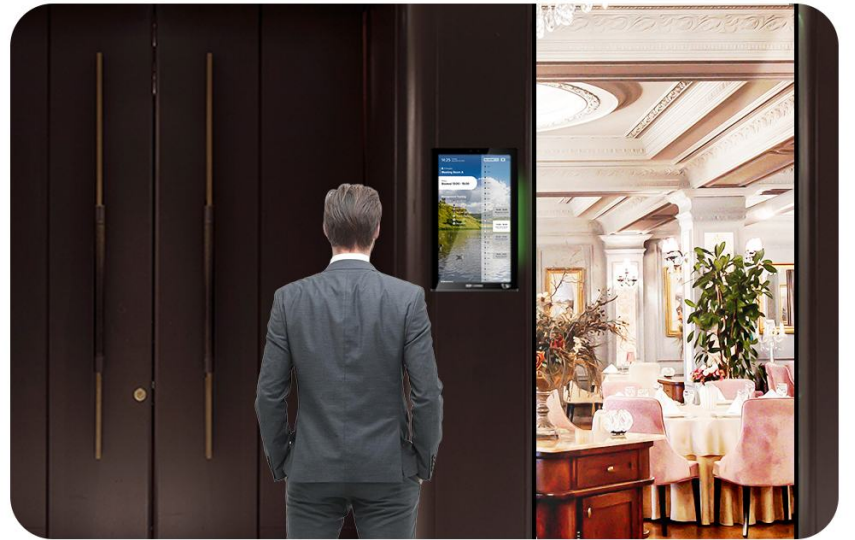

Hotel Convention Halls



Educational Institutions

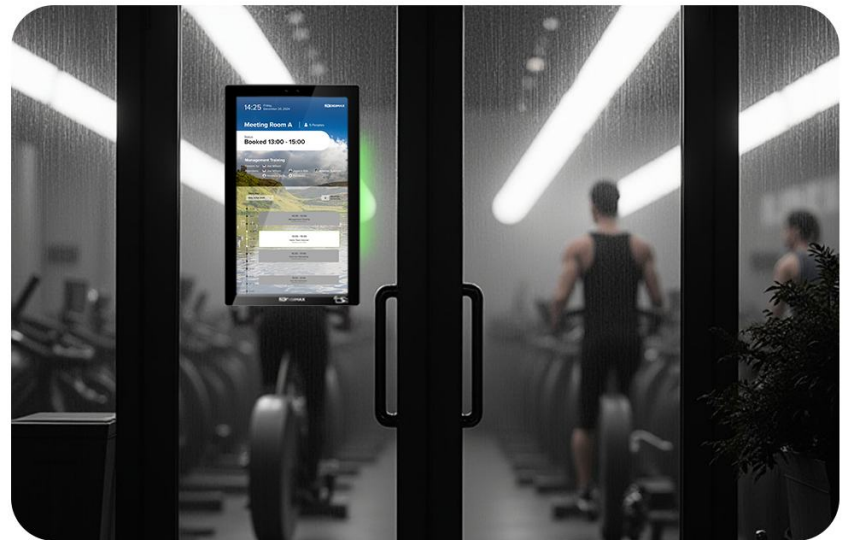

Communal Facilities

Specifications

Model Name		DG03-A9W10	DG03-A9W15
Mainboard	OS	Android 11.0	
	CPU	Quad Core Cortex-A55 2.0GHz	
	GPU	ARM G52 2EE	
	Chipset	RK3568	
	RAM	2GB	
	ROM	16GB	
Display	Size	10.1-inch	15.6-inch
	Backlight	E-LED	
	Aspect Ratio	16:10	9:16
	Color Gamut	72%	
	Resolution	1280 x 800	1080 x 1920
	Contrast	800:1	1000:1
	Response Time	8ms (G TO G)	
	Frequency	60Hz	
	View Angle	85/85/85/85 (L/R/U/D)	178° (H)/178° (V)
	Brightness	350cd/m	
	Life	>30000 hours	
Camera	Pixel	2 Mega pixels	
Speaker	Power	2×1W	
Touch	Touch Technology	Capacitive touch	
	Touch Points	10 points	
	Response Time	25ms~30ms	
	Accuracy	±2mm	
	Touch media	Stylus/ Finger	
Interface	Type-C (5V)	1	
	Type-C (OUT)	1	
Support Format	Video	wmv/avi/flv/rm/rmvb/mpeg/ts/mp4	
	Audio	MP3/WMA/MP2/WAV	
	Image	JPG/BMP/PNG/GIF	
Network	Wi-Fi	2.4G	
	Ethernet	10/100M Adaptive Ethernet	
	Bluetooth	Bluetooth 4.1	
Power	Power Input	12V 3A	
	Adapter	AC 200~240V	
	Rated Power	<20W	

Specifications

Model Name		DG03-A9W10	DG03-A9W15
Physical Parameters	Appearance Style	Wall-mounted	
	Product Color	Black	
	Tempering Glass	3mm	
	Product Dimensions	242×172×24.6mm (L×H×W)	222×380×20mm (L×H×W)
	Package Dimension	360×260×111mm (L×H×W)	445×310×120mm (L×H×W)
	Net Weight	2kg	3kg
	Gross Weight	2.22kg	3.25kg
General Environment	Operating Temperature	0°C to 50°C	
	Storage Temperature	(-20)°C to 60°C	
	Operating Humidity	20% to 85% RH (Non-condensing)	
	Storage Humidity	20% to 85% RH (Non-condensing)	
ScreenDirect Supports Resolutions	Full Screen	1280×800	1080×1920
	Split Screen	470×800	1080×608
Supported Capacity	Authentication Method	Face / Card (IC card)	
	Face Template Capacity	10000 (1:N) (Standard)	
	Card Capacity	10000 (1:N) (Standard)	
	User Capacity	10000 (1:N) (Standard)	
	Transaction Capacity	200000 (1:N)	
	Biometric Algorithm	ZKFace V5.62	
Supported Software	ScreenDirect		
	ZKBio CVSecurity		
	Vizionguard Meeting		
Certification	CE/FCC		